

# DOWN LIGHT



## SERIES KMR16 (GU5.3)


◆ **Scope of Application**

Accent Lighting, General Lighting,

◆ **Hallway Lighting, etc. Indoor use only**

Non-scaled fixture only, Improper use

◆ **will result voided warranty**

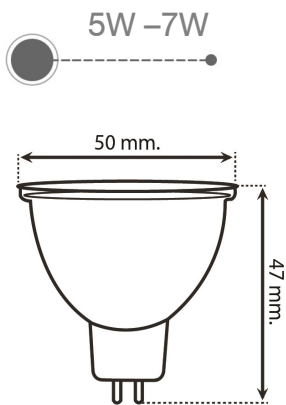

Parameter	Value							
Model	KMR01 5W53	KMR01 7W53	KMR02 5W53	KMR02 7W53	KMR01 5W5312	KMR01 7W5312	KMR01 5W5312	KMR01 7W5312
Rate Power	5W	7W	5W	7W	5W	7W	5W	7W
Luminous Flux	450lm	630lm	450lm	630lm	450lm	630lm	450lm	630lm
Luminous Efficiency	>90lm/w							
LED Chip	COB / SMD							
Color Temperature	CCT 2700K/3000K/4000K/6000K							
Color Rendering Index	>80 Ra							
Input Voltage	AC 220-240V, 50/60Hz		AC 185-265V, 50/60Hz		AC/DC 12V, 50/60Hz			
Driver	Internal / External		Internal / External		Internal Driver		External Driver	
Beam Angle	25° / 40°							
Work Temperature	-40°C to 85°C							
Work Life	>20,000 Hours							
Dimensions	50*47 mm							

**KMR-01 = DIMMABLE**  
**KMR-02 = NON-DIM**